


BLAIRMORE NUMBER

K-BLAIRMORE 736A

CONFIDENTIAL

GEOLOGICAL BRANCH  
ASSESSMENT REPORT

00 257

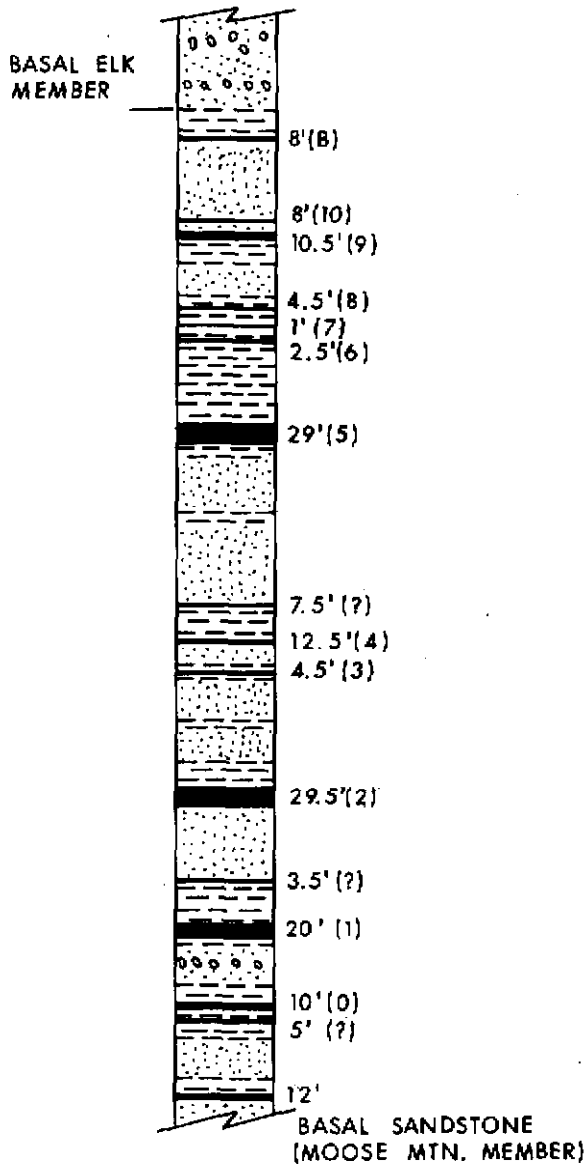






257

NOTE: Data projected from adjacent Fernie Ridge Area.

K-BLAIRMORE 73(6)A

LEGEND

- |   |  |
|---|--|
|  COAL      |  SANDSTONE    |
|  SHALE     |  CONGLOMERATE |
|  SILTSTONE | COAL THICKNESS (SEAM NO.)  |

KAISER RESOURCES

GENERALIZED STRATIGRAPHIC COLUMN  
FOR  
BLAIRMORE NORTH

DWN : R.E. T.	SCALE : 1" - 400'
DATE : MAY 1975	FIG. NO. : 14

257

AREA: Blairmore North K-Blairmore 7364  
 TABLE N<sup>o</sup>: 49  
 RESERVE ESTIMATE - (0-1500' COVER)

SEAM NAME	AVG. THICK.	PITCH 0-15°						PITCH 15-30°						PITCH 30-90°						CUMULATIVE TOTALS - RECOVERABLE RESERVES									SEAM NAME						
		TONS IN PLACE (000's)	RESERVE CLASS.	MINING METHOD	TONS RECOVERED (000's)	CALC. YIELD	AT SP. GR.	TONS WASHED (000's)	TONS IN PLACE (000's)	RESERVE CLASS.	MINING METHOD	TONS RECOVERED (000's)	CALC. YIELD	AT SP. GR.	TONS WASHED (000's)	TONS IN PLACE (000's)	RESERVE CLASS.	MINING METHOD	TONS RECOVERED (000's)	CALC. YIELD	AT SP. GR.	TONS WASHED (000's)	OPEN PIT MINING			UNDERGROUND CONVENTIONAL				UNDERGROUND HYDRAULIC			TOTALS (000's TONS CLEAN)		
																							PROVEN	PARTIALLY EXPLORED	PROJECTED	PROVEN	PARTIALLY EXPLORED	PROJECTED		PROVEN	PARTIALLY EXPLORED	PROJECTED			
B	14.7'	404	P Expl'd	C	61	77%		47							425	B	C	64	77%		49													96	B
10	8.0'	165	"	"	25	64%		16																								16			
PROVEN																																			
PART. EXPL'D		569			86			63							425			64			49										112		112		
PROJECTED																																			
TOTALS		569			86			63							425			64			49											112			

NOTE: (1) Average thickness computed from observations. (ie. drill holes, adit and outcrop measurements.)  
 (2)(i) Tons in place (cu. yds) determined from: (a) Area of unmined coal.  
 (b) Average thickness as determined from (1)  
 (ii) 1 cu. yd. of coal in place = 1.15 net tons raw.  
 (iii) Slope correction applied to (2)(i)(a). (Area of unmined coal.) as follows:  
 (a) For 0°-15° pitch - correction of 7 1/2° applied to area.  
 (b) For 15°-30° pitch - correction of 22 1/2° applied to area.  
 (c) For 30°-90° pitch - correction of 45° applied to area.

(3) Reserve Classification - Definitions for KRL property.  
 A - Proven Reserves - (In Place) -  
 Tons of coal (1.15 nt/cu. yd.) in the ground computed from observations (ie. drill holes, adits, outcrops, mine workings) spaced at intervals of 0.5 miles or less in areas of good geological continuity, with seam thickness greater than 5 feet and under less than 2500 feet of overburden.  
 B - Partially Explored Reserves - (In Place) -  
 Tons of coal (1.15 nt/cu. yd.) in the ground computed partially from observations generally spaced at intervals from 0.5 to 1.5 miles apart and partially from reasonable geological projections. Minimum seam thickness is 5 feet, and maximum overburden 2500 feet. Generally equivalent to "Probable" or "Indicated" in other systems of nomenclature.  
 C - Projected Reserves - (In Place) -  
 Tons of coal (1.15 nt/cu. yd.) in the ground where little direct evidence is available but where geological studies have indicated the continuity of the coal bearing measures. Coal seam thickness projected from adjacent areas.

(4) Mining Method -  
 H - Probably better suited to hydraulic mining method. Used 50% recovery.  
 C - Probably suited to conventional room and pillar method. Used 15% recovery.  
 R - Probably suited to selective mining because of splits or proximity to other seams. Used 15% recovery.  
 O - Open Pit reserve. Assumed 85% recovery.

(5) Reserves Recoverable -  
 Proven Reserves (Recoverable) -  
 Proven Reserves (In Place) adjusted by well substantiated factors for mining and washing recovery.  
 Partially Explored Reserves (Recoverable) -  
 Partially Explored Reserves (In Place) adjusted by generalized factors for mining and washing recovery.

(6) Calculated yield (laboratory) at defined specific gravity arrived at by (a) bulk sample wash tests from adits and/or test pits, or (b) micro sample wash tests from adits and/or test pits.







K - BLAIRMORE (N&S) 73 (6)A  
KAISER RESOURCES LTD  
KOOTENAY COALFIELD

TOPOGRAPHIC SHEETS : 82G  
\_\_\_\_\_

OTHER MAPS :  
\_\_\_\_\_

OPERATOR : KAISER RESOURCES LTD  
\_\_\_\_\_

REPORT PERIOD : 1973 ?

COMPANY : Kaiser Res. LTD

AUTHOR : \_\_\_\_\_


DATE SUBMITTED : \_\_\_\_\_

RESERVES DATA

1. BLAIRMORE NORTH : RESERVE ESTIMATE TABLES. NOS :
  - 49 - 0 - 1500' COVER
  - 50 - 1500' - 2500' COVER
  - 51 - + 2500' COVER
  
2. BLAIRMORE SOUTH : RESERVE ESTIMATE TABLES. NOS :
  - 52 - 0 - 1500' COVER
  - 1500' - 2500' COVER
  - +2500' - COVER.

257

BASAL ELK MEMBER ?

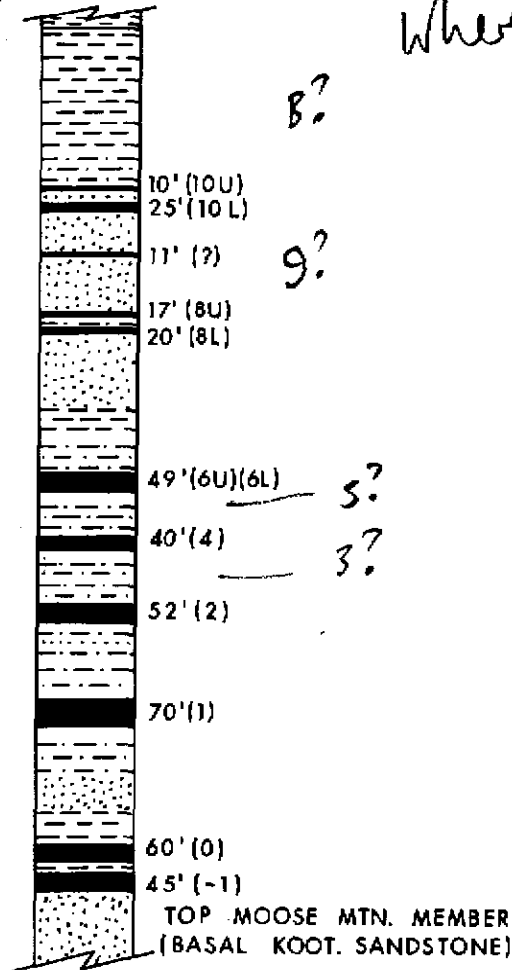

8?  
9?  
Where to seam  
B?  
Dul

5?  
3?

Same as figure 13  
and equally as useless  
Dul

NOTE: Data projected from adjacent Morrissey Ridge Area.

K - BLAIRMORE 73(6)A

LEGEND

- COAL
- SHALE
- SILTSTONE
- SANDSTONE
- CONGLOMERATE
- COAL THICKNESS (SEAM NO.)

KAISER RESOURCES

GENERALIZED STRATIGRAPHIC COLUMN  
FOR  
BLAIRMORE SOUTH

DWN : R. E. T.	SCALE : 1" - 600'
DATE : MAY 1975	FIG. NO. : 15







